



Technical Data Sheet

dozenstampers.nl
GREEN SUCCES ZONDER U

PPR 35μ


Characteristics

Suitable for frozen food packaging or rather cold environment as long as processed above 5°C

Suitable for boxes made from recycled paper

Data		
Adhesion	High initial tack and does not roll off too lightly	
Sound	Noisy	
Warranty	positive printing	1 year
	Bleed diapositive printed / coloured	Due to risk of tearing warranty can not be given
Max. width printing	Tape width minus 2 mm	
Colours	Clear, white, brown	
Number of colours printed	Up to 5 colours and full colour spot	
Core diameter	76 mm	
Minimum order (50 mm x 66 mtr)	4 boxes = 144 rolls	

Tape material	Tapewidth in mm. From ■ in maximum length possible											Max. length	Max. number of colours	Thickness foil
PPR	-	-	-	19	25	-	38	50	75	-	150	990 mtr	5	35μ

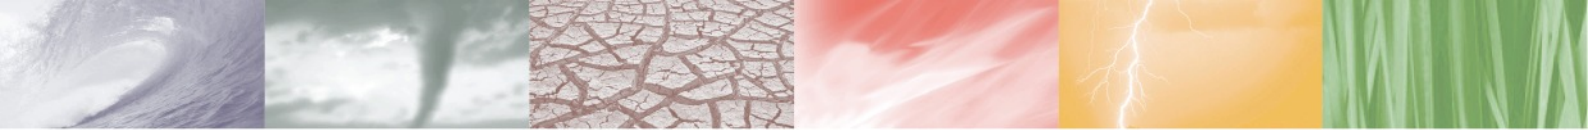

Application

For outer packaging, bandages as well as reinforcing of edges and angles we recommend PP Solvent 35μ

Technical Data	Unit	
Base		polypropylene film, biaxially oriented
Adhesive		Natural rubber
Breaking Load	N/25mm N/cm	minimum 110 minimum 44
Thickness	mm	0.055 ± 10%
Adhesion Strength	cN/25mm N/cm	500 ± 150 2.0 ± 0.8

Properties

- high tensile strength in longitudinal and cross direction
- high adhesion and holding power
- resistant to diluted acids and alkalies (print can be effected)
- heat resistant for short exposure up to about +130° C
- low temperature resistant down to about -30° C after application at room temperature
- easy to unwind
- ecologically beneficial